


### DX KIT FOR AIR HANDLING UNIT APPLICATIONS (VRF)


These kits enable other manufacturers air handling units (AHU) and fan coil units (FCU) to be incorporated into a Fujitsu VRF system or, be connected to a dedicated Fujitsu VRF outdoor unit as a 1:1 system to control outside air ventilation (AHU) or room temperature (FCU).



Multiple temperature sensors optimally control the air handling unit and fan coil unit.

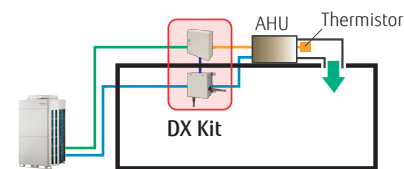


When connecting to an air handling unit, the supply air temperature is controlled by the discharge sensor.

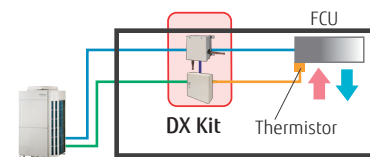


When connecting to a fan coil unit, the room temperature is controlled by the return air temperature sensor.

### Arrangement as part of a VRF system

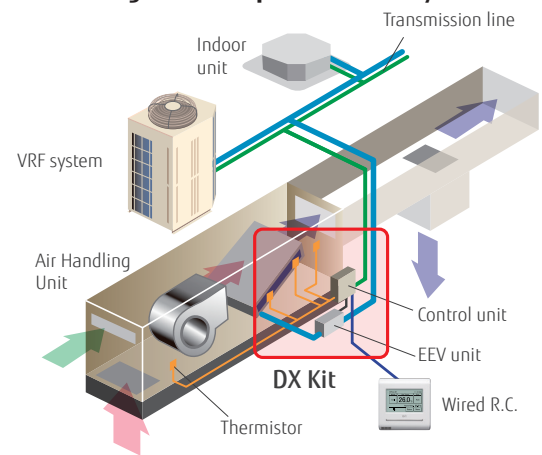


### Supports a wide range of capacity classes

- 2 EEV units can be connected in parallel and up to 20 HP (50 kW) large capacity units. (Separation Tube of UTP-LX180A is required.)
- Connectable capacity range: 5 kW to 50 kW

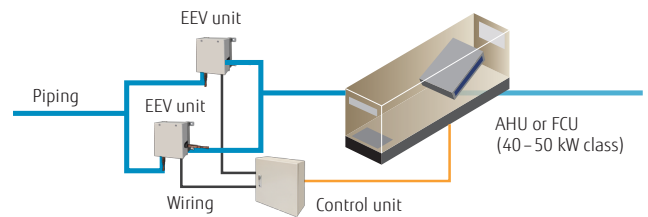


### A variety of controls to match the application

Central control using our VRF controllers or central management controllers

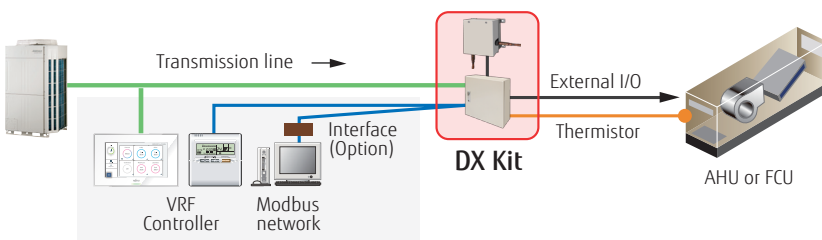

Central control from external controllers

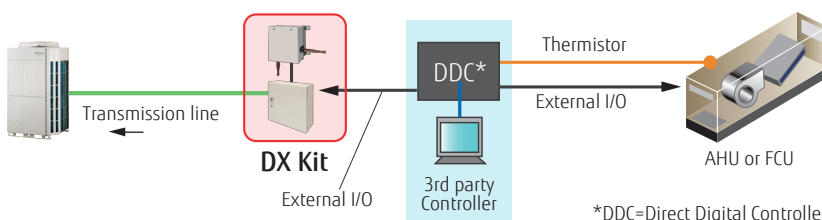

\*DDC=Direct Digital Controller

### Operation Range **-7°C in Heating Mode**

Operation down to -7°C in heating mode

Condition	Inlet Air Temperature
Cooling	5°C to 43°C *
Heating	-7°C to 30°C

\* When connecting J-III or J-II series the upper limit is 40°C

### Functions Summary

#### Inputs

- ON/OFF
- Setting temperature
- Capacity demand
- Heating / Cooling operation mode
- Fault information

#### Outputs

- ON/OFF indication
- Fan ON/OFF indication
- Thermo ON/OFF indication
- Defrost indication
- Fault indication


#### MODBUS® Control

Possible to control via a MODBUS enabled BMS by using optional interface.


### Installation Limitation

- Connectable VRF Series: All VRF Series
- Connectable DX Kit system capacity range: 50 to 100% of the outdoor unit capacity
- Connectable DX Kit system capacity range with indoor units: 30% or less of the outdoor unit capacity
- Max. wiring length from control unit: 10 m
- Max. piping length between EEV unit and indoor unit: 5 m
- Outdoor installation: Control unit (IP54 class) and EEV unit can be installed at an outdoor space.


### Connectable Capacity

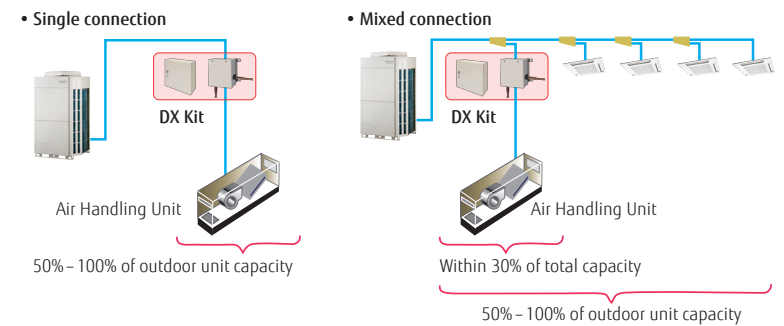

### For 2 EEV units connection (option) Separation Tube: UTP-LX180A

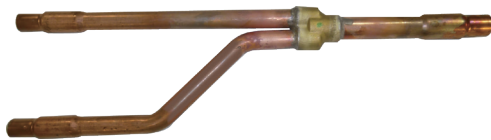


### Piping and wiring length

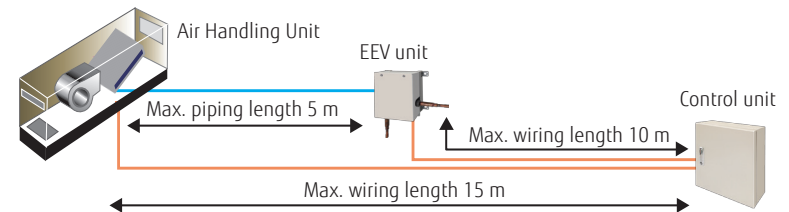

### Control unit: UTY-VDGX

### EEV unit: UTP-VX30A / UTP-VX60A / UTP-VX90A

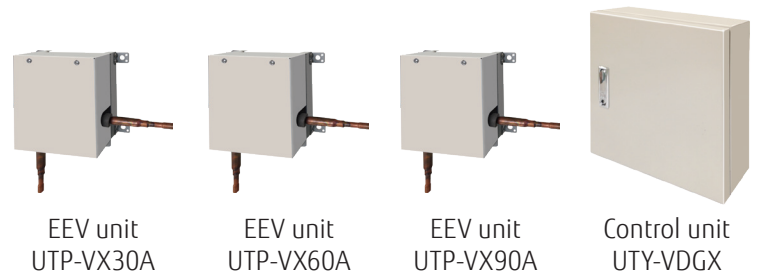

### Specifications

Note: Specifications are based on the following conditions.  
Cooling: Indoor temperature of 27°CDB / 19°CWB, and outdoor temperature of 35°CDB / 24°CWB.  
Heating: Indoor temperature of 20°CDB / (15°CWB), and outdoor temperature of 7°CDB / 6°CWB.  
Pipe length: 7.5 m Voltage: 230 [V].

Connectable Capacity class			5.0 kW	6.3 kW	8.0 kW	10.0 kW	12.5 kW	14.0 kW	20.0 kW	25.0 kW	40.0 kW	50.0 kW
Capacity	Cooling	kW	5.6	6.3	8.0	10.0	12.5	14.0	22.4	25.0	40.0	50.4
	Heating		6.3	7.1	9.0	11.2	14.0	16.0	25.0	28.0	45.0	56.5
Control unit			UTY-VDGX									
Power source		V/Ø/Hz	230/1/50									
Dimensions (H × W × D)		mm	400 × 400 × 120									
EEV unit			UTP-VX30A			UTP-VX60A		UTP-VX90A		UTP-VX90A×2		
Connection pipe diameter (Liquid)		mm	Ø9.53			Ø12.70		Ø12.70		Ø12.70		
Dimensions (H × W × D)			160 × 220 × 90									