

AJY072GALDH

Please visit our webstore for full product and technical documentation 

Nominal Cooling Capacity (kW)	22.4
Nominal Heating Capacity (kW)	22.4
Range	VR-IV
Horse Power	8
Maximum Connectable Indoor Units	17
EER	3.57
COP (Nominal Heating)	4.17
Dimensions (H x W x D) (mm)	1690 x 930 x 765
Weight (kg)	262
Airflow Rate (Cooling - Heating) High (m3/h)	11100 - 11100
Available Static Pressure (Pa)	Max 80
Sound Pressure Level (Cooling - Heating) High (dB(A))	56 - 58
Sound Power Level (Cooling - Heating) High (dB(A))	77 - 79
Refrigerant Type (Global Warming Potential)	R410A (2,088)
Refrigerant Charge (kg)	11.8
Refrigerant CO2eq-T	24.6
Unit Power Supply	3Ph-400V-50Hz
Cooling Mode Operating Range (°C)	-10 to 46
Heating Mode Operating Range (°C)	-20 to 21



Document Downloads


[Cooling Capacity](#)
[Dimensional Drawing](#)
[Electrical Characteristics](#)
[Heating Capacity](#)
[Installation Manual](#)
[Installation Space](#)
[Noise Curve](#)
[Product Image](#)
[Refrigerant Circuit](#)

[Spare Parts List All Pages](#)
[Specifications](#)
[Wiring Diagram](#)

Related Items

[UTPDX567A](#)
[UTPRX01AH](#)
[UTPRX01BH](#)
[UTPRX01CH](#)
[UTPRX04BH](#)
[UTPRX08AH](#)
[UTPRX12AH](#)

Outdoor Unit Branch Kit (3 Pipe)
 RB Unit - A Max 3 IUs, Capacity less than 8.0kW
 RB Unit - B Max 8 IUs, Capacity less than 18.0kW
 RB Unit - C Max 8 IUs, Capacity less than 28.0kW
 4 Branch RB Unit Max Connectable Capacity < 56.1kW
 8 Branch RB Unit Max Connectable Capacity < 72.0kW
 12 Branch RB Unit Max Connectable Capacity < 95kW

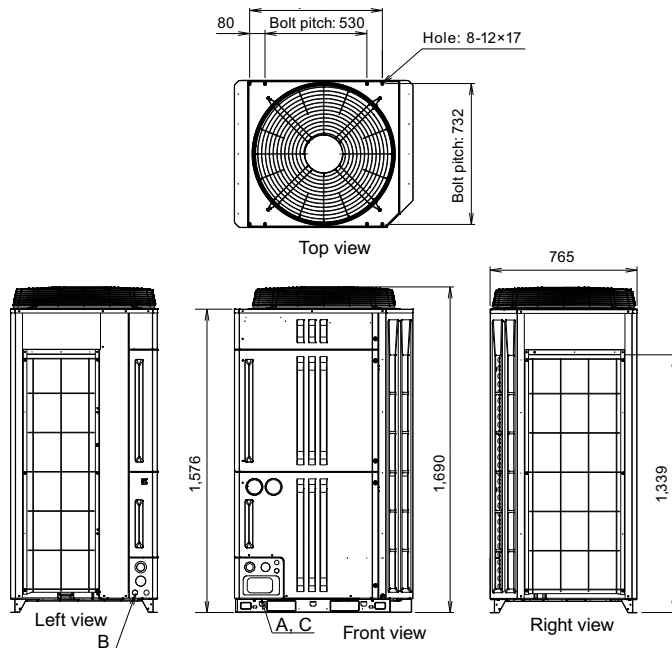

Units: mm

*Specifications and design are subject to change without notice for further improvement.
 *Actual products' colors may be different from the colors shown in this printed material.