

### AJY108GALBH

Please visit our webstore for full product and technical documentation 

Nominal Cooling Capacity (kW)	33.5
Nominal Heating Capacity (kW)	33.5
Range	VR-IV
Horse Power	12
Maximum Connectable Indoor Units	26
EER	3.44
COP (Nominal Heating)	4.25
Dimensions (H x W x D) (mm)	1690 x 930 x 765
Weight (kg)	262
Airflow Rate (Cooling - Heating) High (m3/h)	11100 - 11100
Available Static Pressure (Pa)	Max 80
Sound Pressure Level (Cooling - Heating) High (dB(A))	59 - 62
Sound Power Level (Cooling - Heating) High (dB(A))	79 - 82
Refrigerant Type (Global Warming Potential)	R410A (2,088)
Refrigerant Charge (kg)	11.8
Refrigerant CO2eq-T	24.6
Unit Power Supply	3Ph-400V-50Hz
Cooling Mode Operating Range (°C)	-15 to 46
Heating Mode Operating Range (°C)	-20 to 21



#### Document Downloads


[Cooling Capacity](#)  
[Dimensional Drawing](#)  
[Electrical Characteristics](#)  
[Heating Capacity](#)  
[Installation Manual](#)  
[Installation Space](#)  
[Noise Curve](#)  
[Product Image](#)  
[Refrigerant Circuit](#)

[Spare Parts List All Pages](#)  
[Specifications](#)  
[Wiring Diagram](#)

#### Related Items

[UTPDX567A](#)  
[UTPRX01AH](#)  
[UTPRX01BH](#)  
[UTPRX01CH](#)  
[UTPRX04BH](#)  
[UTPRX08AH](#)  
[UTPRX12AH](#)

Outdoor Unit Branch Kit (3 Pipe)  
 RB Unit - A Max 3 IUs, Capacity less than 8.0kW  
 RB Unit - B Max 8 IUs, Capacity less than 18.0kW  
 RB Unit - C Max 8 IUs, Capacity less than 28.0kW  
 4 Branch RB Unit Max Connectable Capacity < 56.1kW  
 8 Branch RB Unit Max Connectable Capacity < 72.0kW  
 12 Branch RB Unit Max Connectable Capacity < 95kW

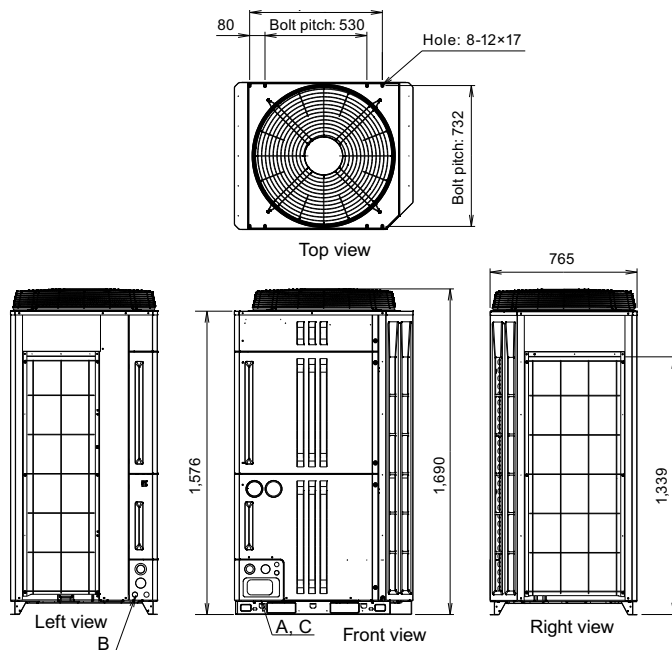

Units: mm

\*Specifications and design are subject to change without notice for further improvement.  
 \*Actual products' colors may be different from the colors shown in this printed material.