FUITSU | AIR CONDITIONING

AOYG14KBTA2

Nominal Cooling Capacity	(kW)	4.0
Nominal Heating Capacity	(kW)	4.4
Maximum Connectable Indoor Units		2
EER		4.12
COP (Nominal Heating)		4.63
Height	(mm)	542
Width	(mm)	799
Depth	(mm)	290
Weight	(kg)	33
Sound Pressure Level - Cooling - High	(dB(A))	47
Sound Pressure Level - Heating - High	(dB(A))	49
Refrigerant Type (Global Warming Potential)		R32 (675)
Liquid Pipe Size		Depending on Indoor
Gas Pipe Size		Depending on Indoor
Max Pipe Length	(m)	30 Total 20 Each Unit
Max Height Difference	(m)	15
Refrigerant Charge (kg)	(kg)	0.9
Refrigerant CO2eq-T		0.608
Unit Power Supply		1Ph-230V-50Hz
Cooling Mode Minimum Ambient	(°C)	-10
Cooling Mode Maximum Ambient	(°C)	46
Heating Mode Minimum Ambient	(°C)	-15
Heating Mode Maximum Ambient	(°C)	24


Please visit our webstore for full product and technical documentation




Document Downloads

<u>Airflow</u> Capacity Correction Capacity Tables Charging Details Controls & Accessories Design & Technical Manual Dimensional Drawing Electrical Characteristics Indoor Unit Combinations

Installation Manual Noise Curve Product Image Refrigerant Circuit Spare Parts List All Pages **Specifications** Wiring Diagram

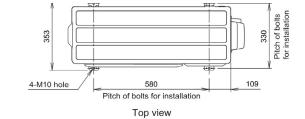

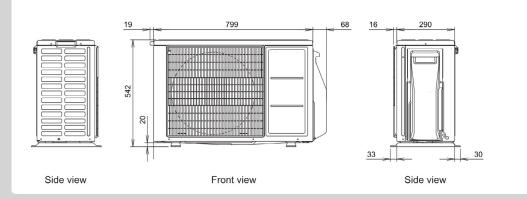

Units: mm

•Specifications and design are subject to change without notice for further improvement. •Actual products' colors may be different from the colors shown in this printed material.

FUJITSU GENERAL AIR CONDITIONING (UK) LIMITED Unit 150, Centennial Park, Centennial Avenue, Elstree, Borehamwood, Herts, WD6 3SG www.fujitsu-general.com/uk sales@fgac.fujitsu-general.com Tel: +44 (0) 208 731 3450 Fax: +44 (0) 208 731 3451