

AOYG90LRLA

Please visit our webstore for full product and technical documentation 

Nominal Cooling Capacity	(kW)	22.0
Nominal Heating Capacity	(kW)	27.0
Height	(mm)	1428
Width	(mm)	1080
Depth	(mm)	480
Weight	(kg)	174
Airflow Rate - Cooling - High	(m3/h)	8400
Airflow Rate - Heating - High	(m3/h)	9000
Sound Pressure Level - Cooling - High	(dB(A))	55
Sound Pressure Level - Heating - High	(dB(A))	57
Refrigerant Type (Global Warming Potential)		R410A (2,088)
Liquid Pipe Size		1/2"
Gas Pipe Size		7/8"
Min - Max Pipe Length	(m)	5 - 100
Max Height Difference	(m)	30
Refrigerant Charge (kg)	(kg)	7.1
Refrigerant CO2eq-T		14.825
Precharged For	(m)	30
Additional Charge (g/m)	(g/m)	3/8 = 50 1/2 = 110
Unit Power Supply		3Ph-400V-50Hz
Suggested Fuse Size	(A)	16
Cooling Mode Minimum Ambient	(°C)	-15
Cooling Mode Maximum Ambient	(°C)	46
Heating Mode Minimum Ambient	(°C)	-20
Heating Mode Maximum Ambient	(°C)	24




Document Downloads

[Accessories](#)
[Airflow](#)
[Capacity Correction](#)
[Dimensional Drawing](#)
[Function Settings](#)
[Inputs & Outputs](#)
[Installation Manual](#)
[Noise Curve](#)
[Product Image](#)
[Refrigerant Circuit](#)
[Spare Parts List All Pages](#)
[Specifications](#)
[Wiring Diagram](#)


Related Items

[ARYG90LHTA](#)


22.0kW High Static Ducted Indoor Unit - R410A

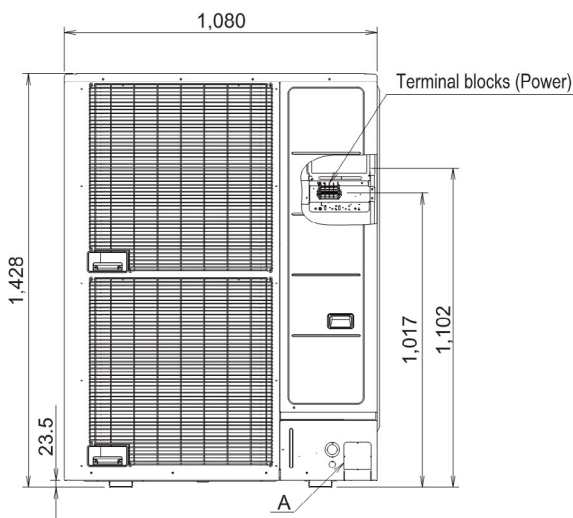

Front view

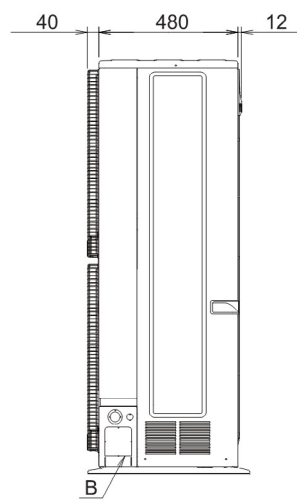

Side view

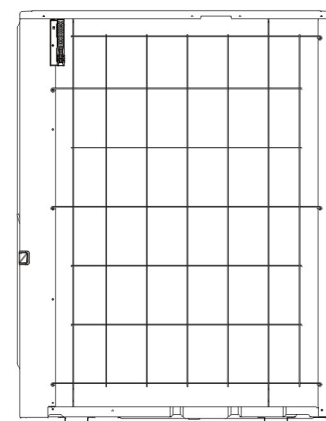

Rear view

Units: mm

*Specifications and design are subject to change without notice for further improvement.
 •Actual products' colors may be different from the colors shown in this printed material.