


MODEL : AR*G14LLTB (UTD-GXSA-W)

Note: This data is measured with the Auto louver grille kit(option) installed.


Conditions	
Fan speed	: High
Operation mode	: Fan

● Air velocity distribution


Top view
Vertical flap : Up
Horizontal flap : Center

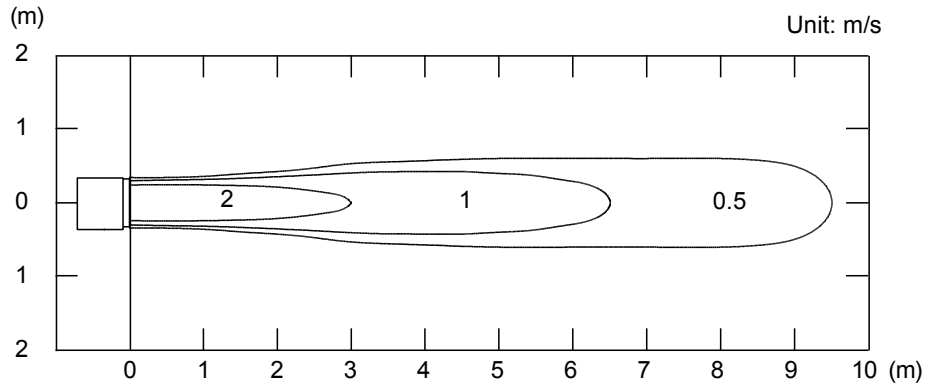

Top view
Vertical flap : Up
Horizontal flap : Right & Left

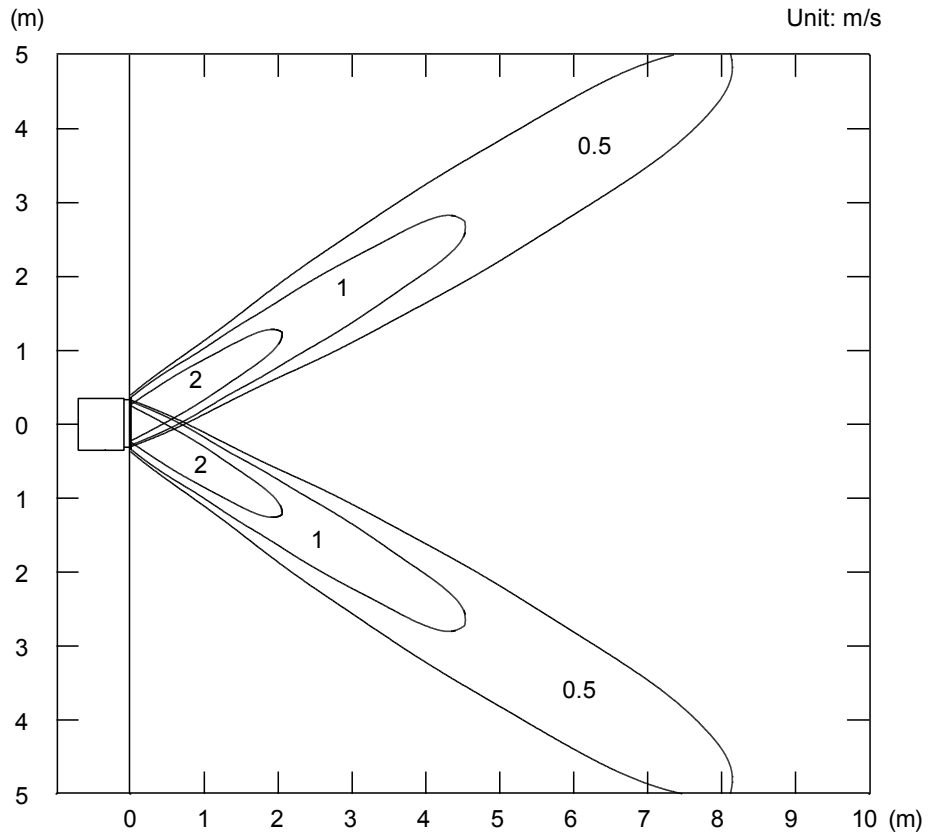

Side view
Vertical flap : Up
Horizontal flap : Center

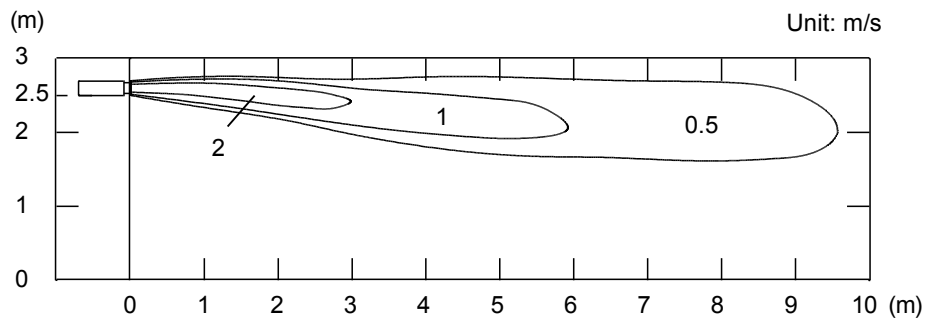


Note: This data is measured with the Auto louver grille kit(option) installed.

Conditions	
Fan speed	: High
Operation mode	: Heat
Reference Data	


● Air velocity distribution

Side view
Vertical flap : Down
Horizontal flap : Center


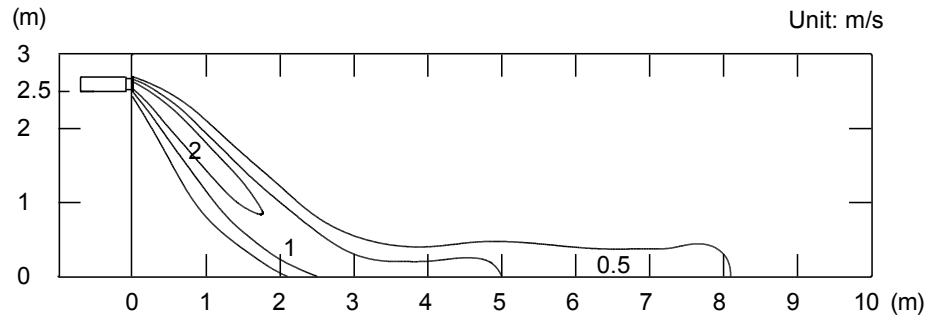


● Air temperature distribution

Side view
Vertical flap : Down
Horizontal flap : Center

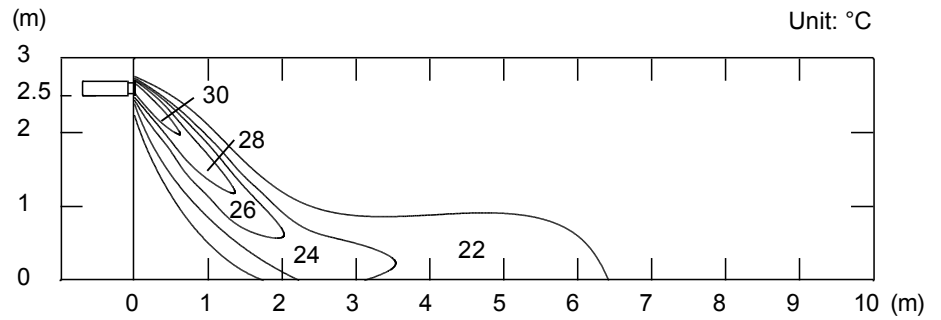


MODEL : AR*G14LLTB

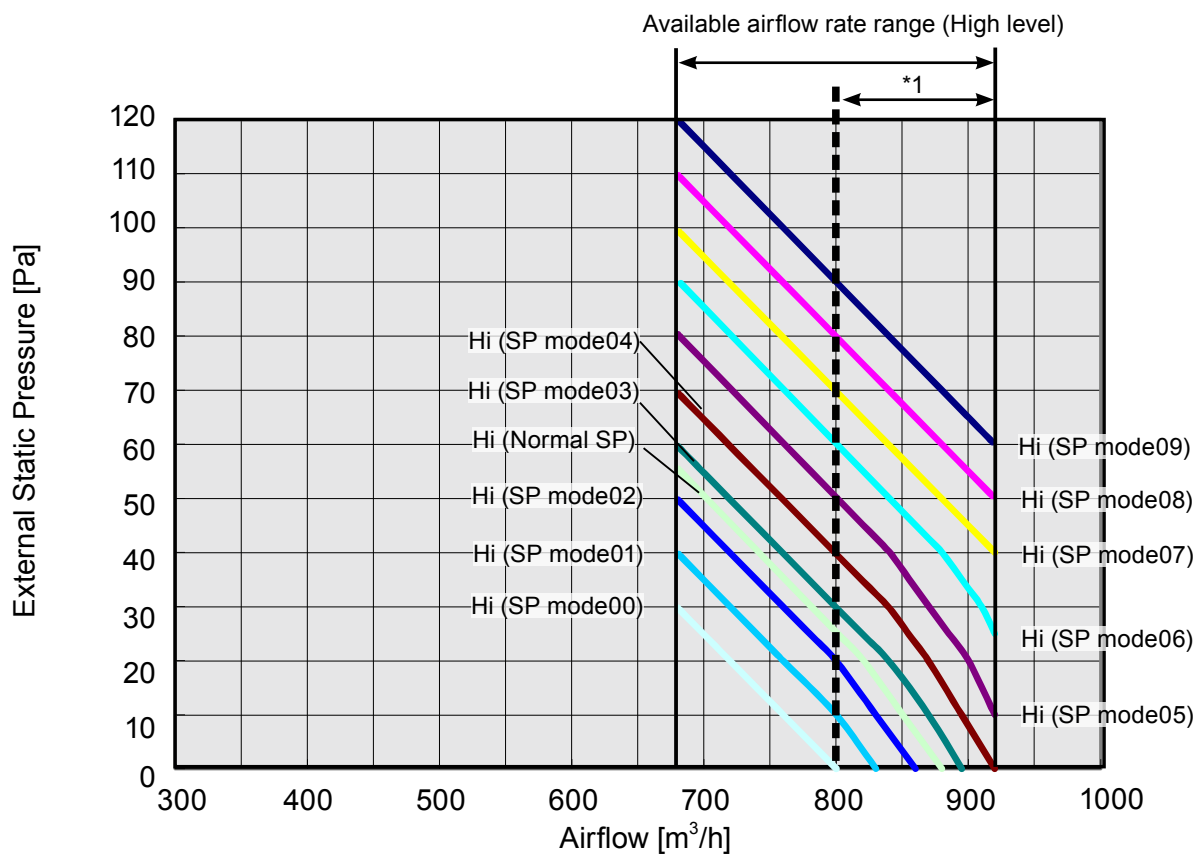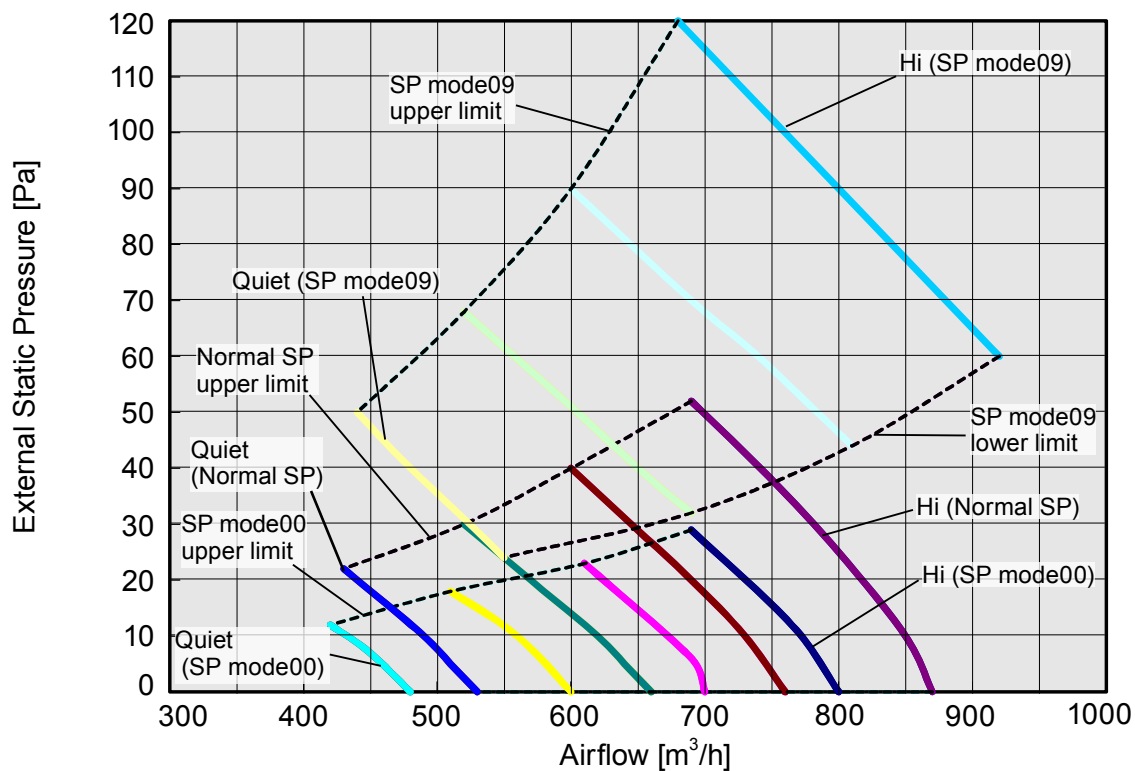


*1: Available airflow rate range when Auto louver grille (option) is installed.
Fan speed : High
Vertical flap : Up

● Cooling

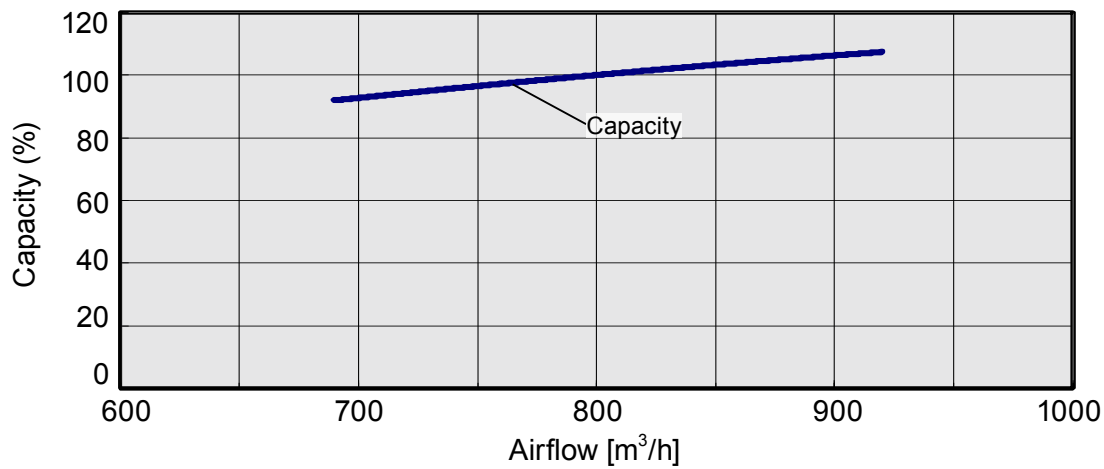

● Heating

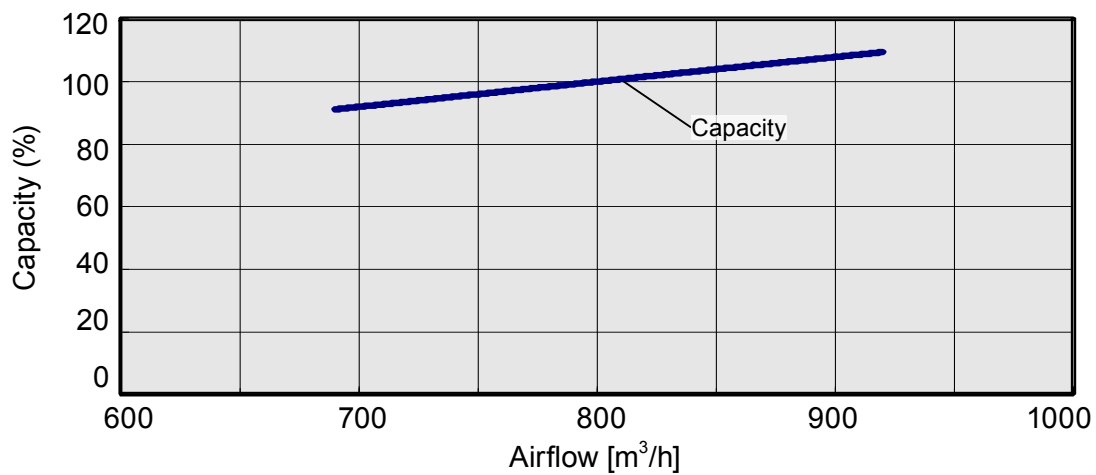

■ MODEL: AR*G14LLTB

● Cooling

Fan speed	Number of rotations (r.p.m.)	Airflow	
HIGH	1560	m ³ /h	800
		l/s	222
		CFM	471
MED	1400	m ³ /h	700
		l/s	194
		CFM	412
LOW	1240	m ³ /h	600
		l/s	167
		CFM	353
QUIET	1030	m ³ /h	480
		l/s	133
		CFM	283

● Heating

Fan speed	Number of rotations (r.p.m.)	Airflow	
HIGH	1560	m ³ /h	800
		l/s	222
		CFM	471
MED	1400	m ³ /h	700
		l/s	194
		CFM	412
LOW	1240	m ³ /h	600
		l/s	167
		CFM	353
QUIET	1030	m ³ /h	480
		l/s	133
		CFM	283