


2. Dimensions

2-1. Models: AUXG09KVLA, AUXG12KVLA, AUXG14KVLA, AUXG18KVLA, and AUXG22KVLA


Unit: mm

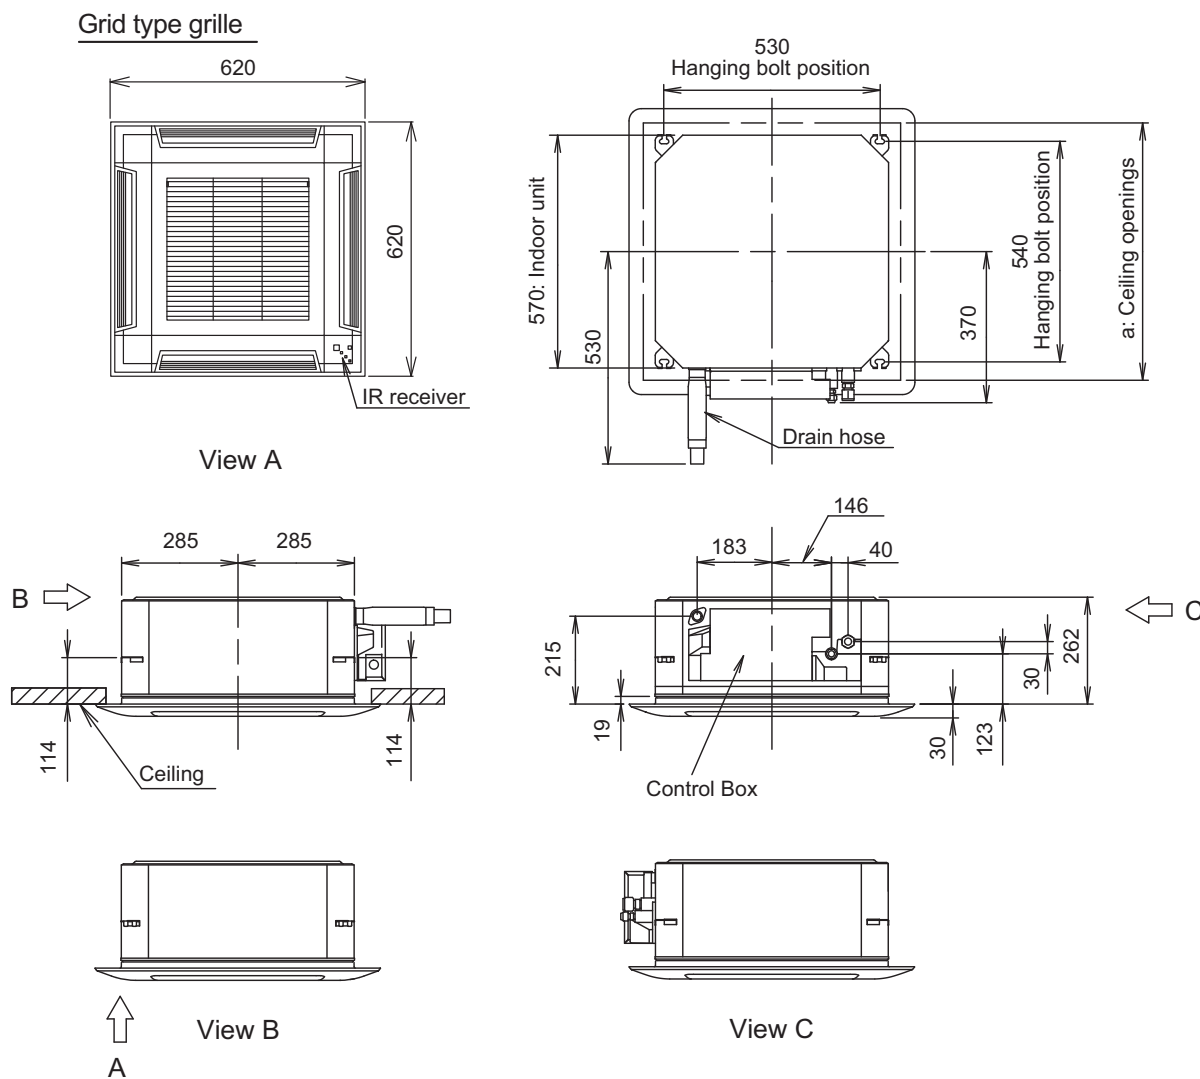

| a: Ceiling openings | | |
|--------------------------------------|----|------------|
| Cassette grille (Option [Grid type]) | mm | 580 to 610 |

2-2. Installation space requirement


Unit: mm

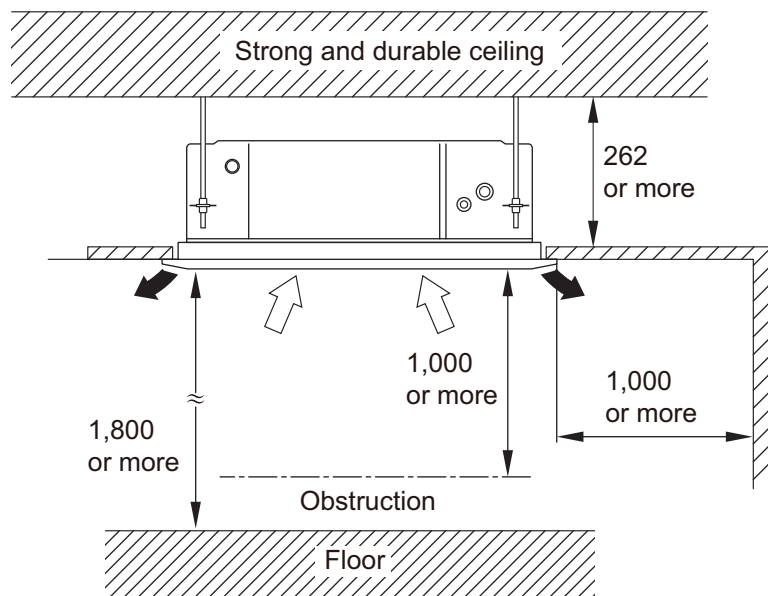

| Maximum height from floor to ceiling (Unit: mm) | |
|---|-------|
| Standard | 2,700 |
| High ceiling | 3,000 |

3-way direction setting:

Unit: mm

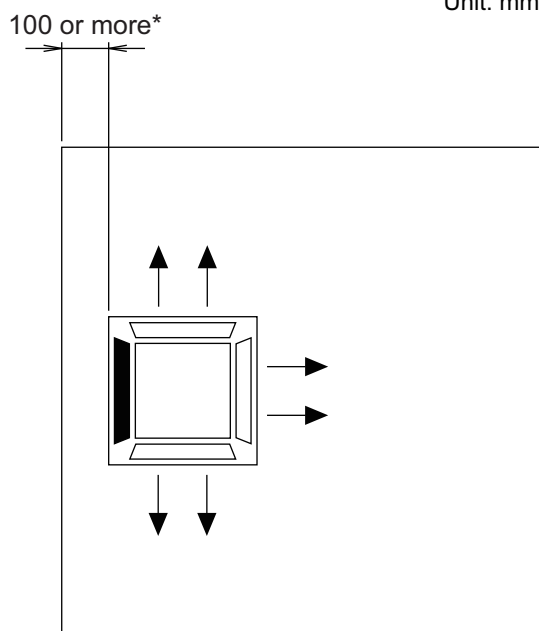

NOTES:

- To set "3-direction", optional Air outlet shutter plate (UTR-YDZB) must be installed, and the "outlet-direction" need to be switched to "3-way" by remote controller.
*When installing the indoor unit, be careful about the maintenance space.
- The ceiling height cannot be set in the 3-way outlet mode. Therefore, ceiling height setting change by function setting 20 is prohibited. For details, refer to "[Contents of function setting](#)" on page 41.