


AUXK054GLEH

Please visit our [webstore](#) for full product and technical documentation

Unit Type	Circular Flow Cassette	
Remote Controller	Option	
Nominal Cooling Capacity (kW)		14.0
UK Total Cooling Capacity (kW)		10.4
UK Sensible Cooling Capacity (kW)		8.7
Nominal Heating Capacity (kW)		14.9
UK Heating Capacity (kW)		16.0
Height (mm)		288
Width (mm)		840
Depth (mm)		840
Weight (kg)		29.5
Grille	UTGUKYCW	
Grille Dimensions (HxWxD) (mm)		53 x 950 x 950
Grille Weight (kg)		6
Airflow Rate - Cooling - High (m3/h)		2040
Sound Pressure Level - Cooling - High (dB(A))		47
Sound Pressure Level - Cooling - Low (dB(A))		36
Refrigerant Type (Global Warming Potential)	R410A (2,088)	
Liquid Pipe Size	3/8"	
Gas Pipe Size	5/8"	
Unit Power Supply	1Ph-230V-50Hz	

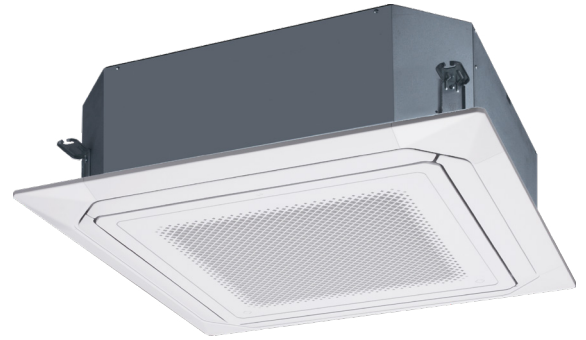


Document Downloads

- [Air Distribution](#)
- [Airflow](#)
- [Cooling Capacity](#)
- [Dimensional Drawing](#)
- [Electrical Characteristics](#)
- [Heating Capacity](#)
- [Installation Manual](#)
- [Noise Curve](#)
- [Operation Manual](#)
- [Product Image](#)
- [Spare Parts List All Pages](#)
- [Specifications](#)
- [Wiring Diagram](#)

Related Items

- [UTGUKYCW](#) 360 Cassette Grille
- [UTZVXRA](#) Fresh Air Intake Kit for Cassette
- [UTYRNRYZ5](#) Touch Screen Remote Controller
- [UTYRCRYZ1](#) Compact Simple Remote controller
- [UTYRSRY](#) Simple Remote Controller (with Master Control)
- [UTYRHRY](#) Simple Remote Controller (without Master Control)
- [UTYLNHY](#) Wireless Remote Controller
- [UTYTF SXZ1](#) Wireless LAN interface
- [UTYSHZXC](#) Human Sensor for Circular Flow Cassette
- [UTYLBH XD](#) IR Receiver Kit for Circular Flow Cassette

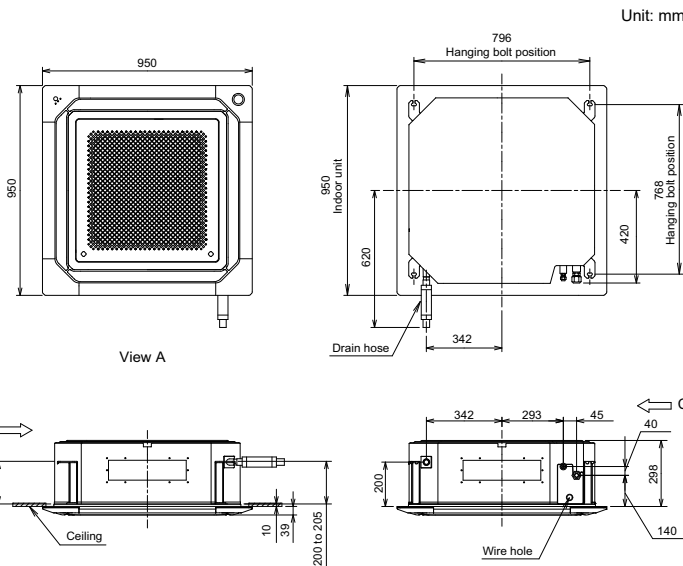

*Specifications and design are subject to change without notice for further improvement.
 •Actual products' colors may be different from the colors shown in this printed material.

Distributed by :

FUJITSU GENERAL AIR CONDITIONING (UK) LIMITED
 Unit 150, Centennial Park, Centennial Avenue, Elstree, Borehamwood, Herts, WD6 3SG

www.fujitsu-general.com/uk

sales@fgac.fujitsu-general.com

Tel: +44 (0) 208 731 3450 Fax: +44 (0) 208 731 3451