FUJITSU | AIR CONDITIONING

Product Data Sheet

AUXV018GLEH

Please visit our webstore for full product and technical documentation

Unit Type		One Way Cassette
Remote Controller		Option
Nominal Cooling Capacity	(kW)	5.6
UK Total Cooling Capacity	(kW)	4.2
UK Sensible Cooling Capacity	(kW)	3.4
Nominal Heating Capacity	(kW)	5.9
UK Heating Capacity	(kW)	6.3
Height	(mm)	198
Width	(mm)	1190
Depth	(mm)	570
Weight	(kg)	26
Grille		UTGUNYBW
Grille Dimensions (HxWxD)	(mm)	43 x 1360 x 620
Grille Weight	(kg)	8.5
Airflow Rate - Cooling - High	(m3/h)	890
Sound Pressure Level - Cooling - High	(dB(A))	44
Sound Pressure Level - Cooling - Low	(dB(A))	36
Refrigerant Type (Global Warming Potential)		R410A (2,088)
Liquid Pipe Size		1/4"
Gas Pipe Size		1/2"
Unit Power Supply		1Ph-230V-50Hz

Unit: mm

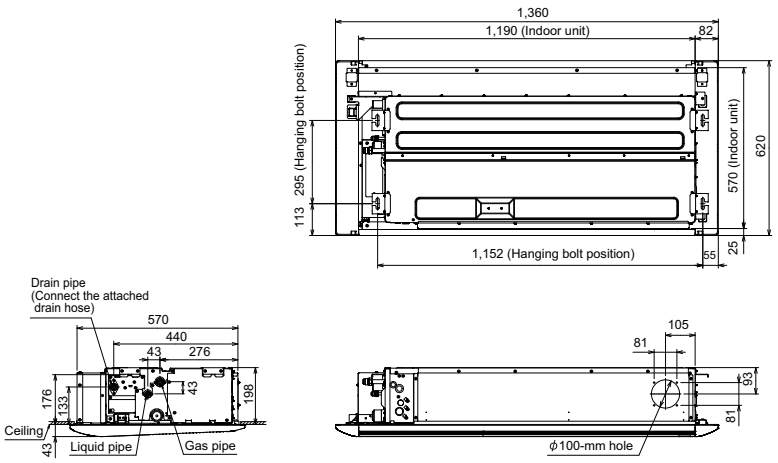

Document Downloads

- Air Distribution
- Airflow
- Controls & Accessories
- Dimensional Drawing
- Installation Manual
- Noise Curve
- Operation Manual
- Product Image
- Spare Parts List All Pages
- Specifications
- Wiring Diagram

Related Items

UTGUNYBW	1 Way Blow Cassette Grille (size 14 to 24 IU's)
UTYRNRYZ5	Touch Screen Remote Controller
UTYRCRYZ1	Compact Simple Remote controller
UTYRSRY	Simple Remote Controller (with Master Control)
UTYRHRY	Simple Remote Controller (without Master Control)
UTYLNHY	Wireless Remote Controller

•Specifications and design are subject to change without notice for further improvement.
•Actual products' colors may be different from the colors shown in this printed material.

Distributed by :

FUJITSU GENERAL AIR CONDITIONING (UK) LIMITED
Unit 150, Centennial Park, Centennial Avenue, Elstree, Borehamwood, Herts, WD6 3SG
www.fujitsu-general.com/uk
sales@fgac.fujitsu-general.com
Tel: +44 (0) 208 731 3450 Fax: +44 (0) 208 731 3451