

ARXD007GLEH

Please visit our webstore for full product and technical documentation



Unit Type		Slim Duct / Slim
Remote Controller		Concealed Floor Option
Nominal Cooling Capacity	(kW)	2.2
UK Total Cooling Capacity	(kW)	1.6
UK Sensible Cooling Capacity	(kW)	1.5
Nominal Heating Capacity	(kW)	2.6
UK Heating Capacity	(kW)	2.8
Height	(mm)	198
Width	(mm)	700
Depth	(mm)	620
Weight	(kg)	17
Standard Static Pressure	(Pa)	25
Static Pressure Range	(Pa)	0 to 90
Airflow Rate - Cooling - High	(m3/h)	550
Sound Pressure Level - Cooling - High	(dB(A))	28
Sound Pressure Level - Cooling - Low	(dB(A))	22
Refrigerant Type (Global Warming Potential)		R410A (2,088)
Liquid Pipe Size		1/4"
Gas Pipe Size		3/8"
Unit Power Supply		1Ph-230V-50Hz




Document Downloads

Air Distribution Operation Manual <u>Airflow</u> **Product Image** Spare Parts List All Pages **Specifications Electrical Characteristics** Wiring Diagram

Cooling Capacity Dimensional Drawing Fan Curve **Heating Capacity Installation Manual** Noise Curve

Unit: mm

Related Items UTDGXTAW Auto Louvre Grille Kit (Size 07-14 IU's) UTYRNRYZ5 Touch Screen Remote Controller UTYRCRYZ1 Compact Simple Remote controller Simple Remote Controller (with Master Control) UTYRSRY **UTYRHRY** Simple Remote Controller (without Master Control) Wireless Remote Controller <u>UTYLNHY</u> **UTYXSZX** Remote Sensor Unit (for All Duct type) **UTYTRHX** Infra-Red Receiver

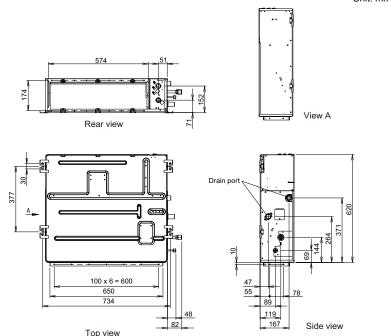

[•]Specifications and design are subject to change without notice for further improvement.

[•]Actual products' colors may be different from the colors shown in this printed material.