


## MODEL : AR\*G18LLTB (UTD-GXSB-W)

Note: This data is measured with the Auto louver grille kit(option) installed.


Conditions	
Fan speed	: High
Operation mode	: Fan

### ● Air velocity distribution


Top view  
Vertical flap : Up  
Horizontal flap : Center

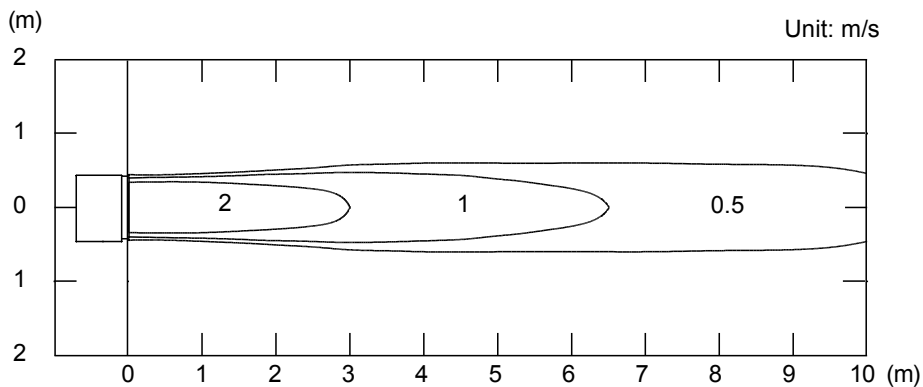

Top view  
Vertical flap : Up  
Horizontal flap : Right & Left

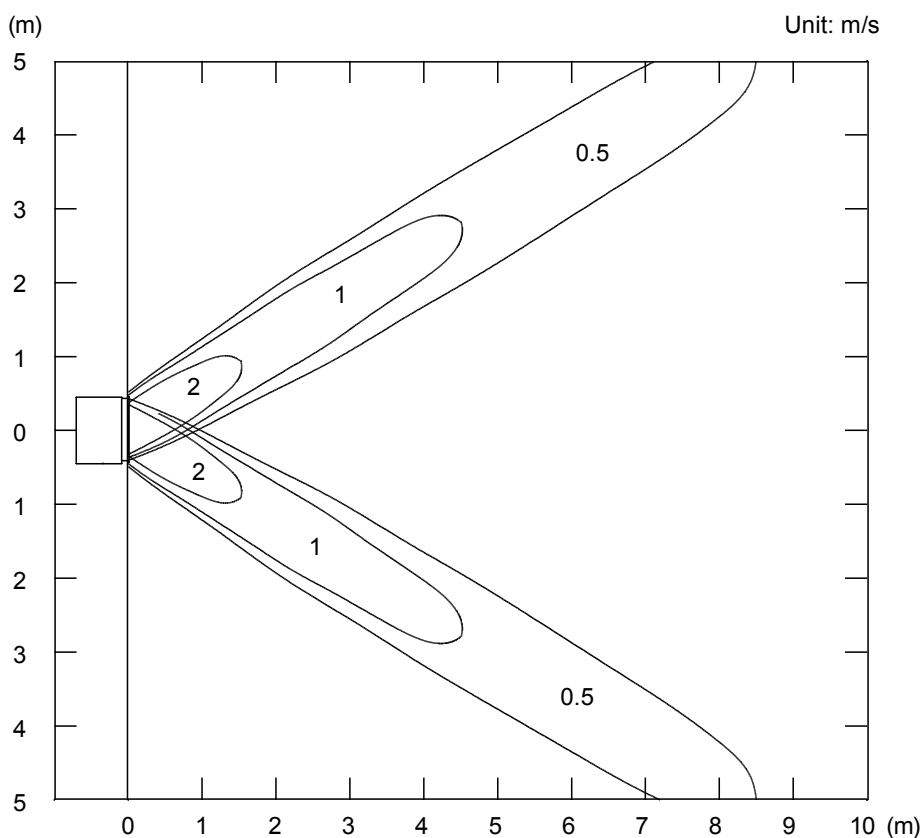

Side view  
Vertical flap : Up  
Horizontal flap : Center

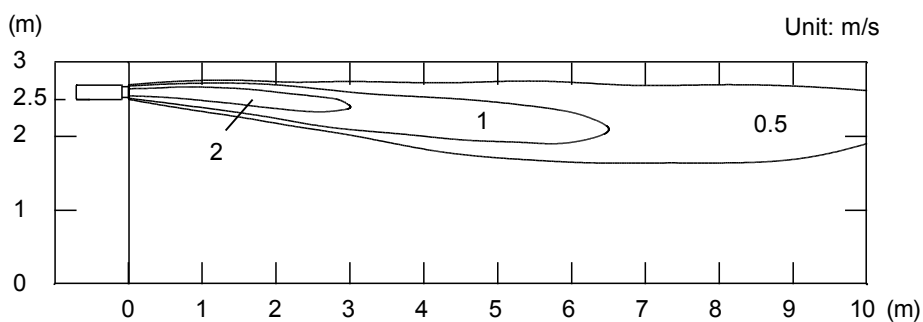


Note: This data is measured with the Auto louver grille kit(option) installed.

Conditions	
Fan speed	: High
Operation mode	: Heat
Reference Data	


### ● Air velocity distribution

Side view  
Vertical flap : Down  
Horizontal flap : Center


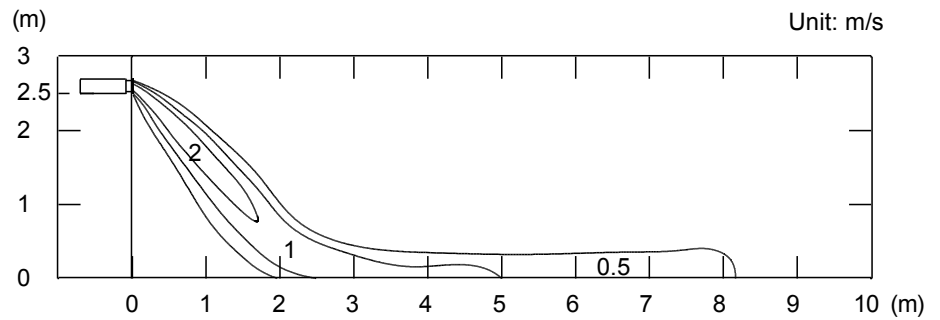


### ● Air temperature distribution

Side view  
Vertical flap : Down  
Horizontal flap : Center

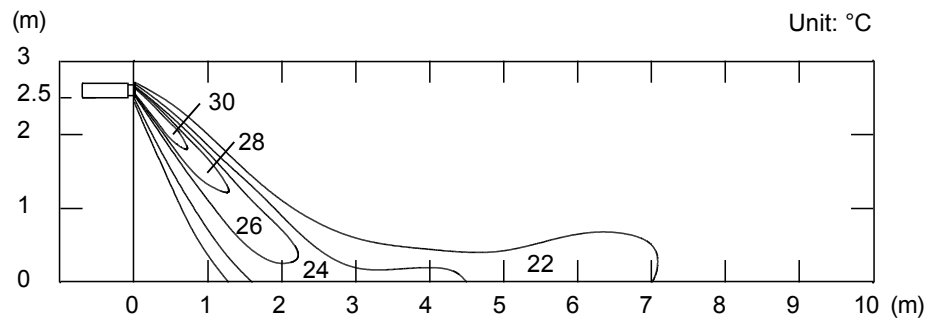


### MODEL : AR\*G18LLTB

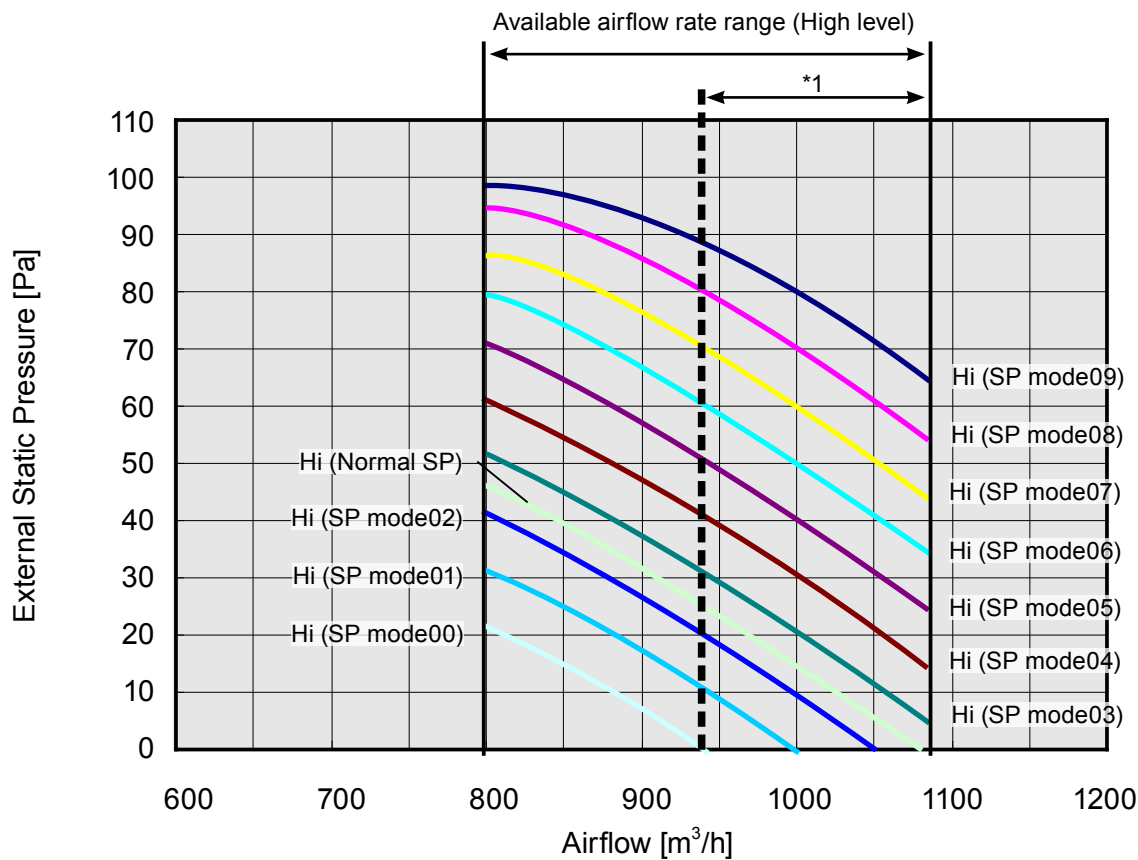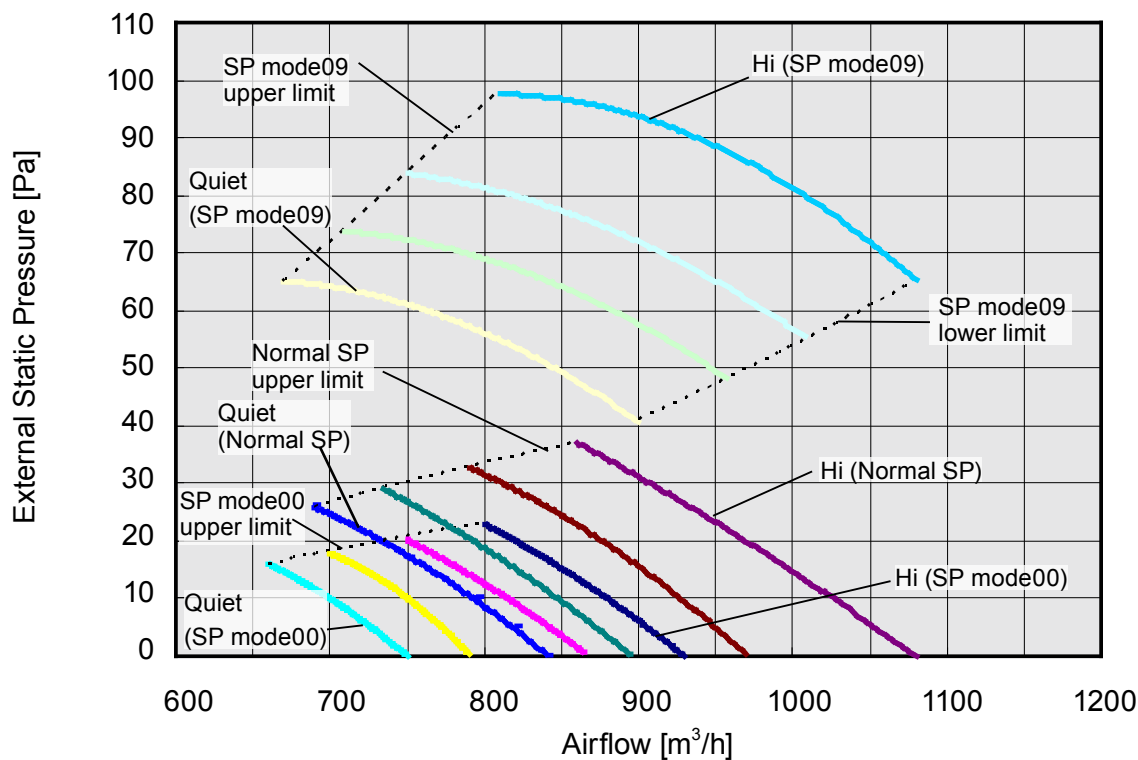


\*1: Available airflow rate range when Auto louver grille (option) is installed.  
Fan speed : High  
Vertical flap : Up

### ● Cooling

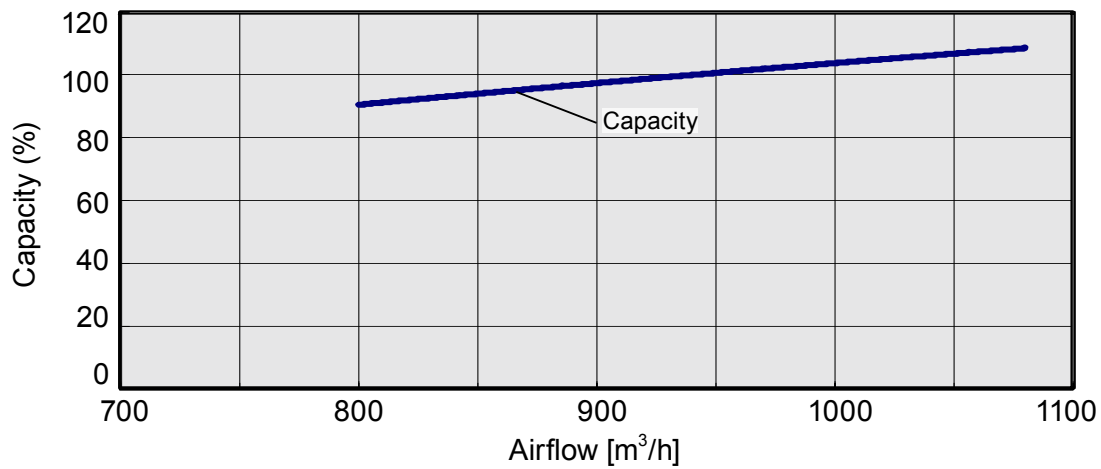

### ● Heating

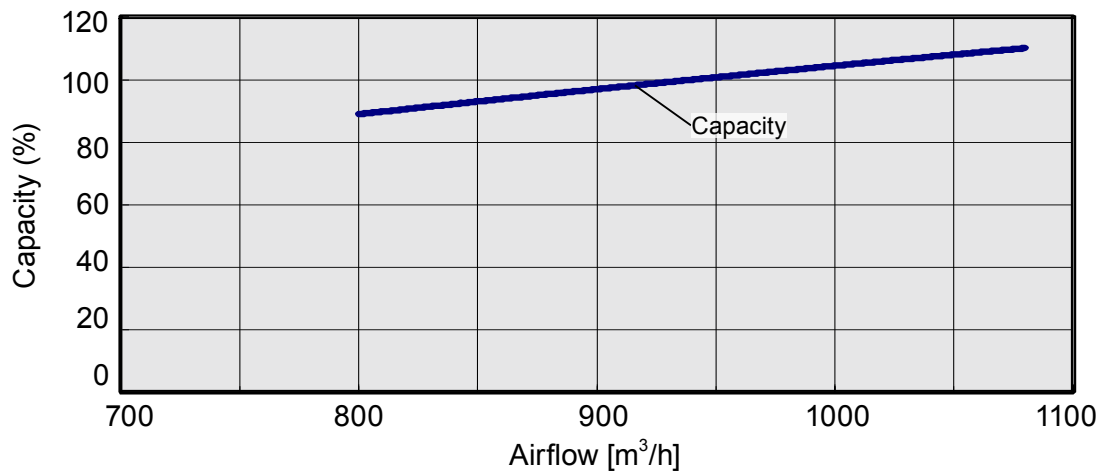

## ■ MODEL: AR\*G18LLTB

### ● Cooling

Fan speed	Number of rotations (r.p.m.)	Airflow	
HIGH	1380	m <sup>3</sup> /h	940
		l/s	261
		CFM	553
MED	1300	m <sup>3</sup> /h	880
		l/s	244
		CFM	518
LOW	1220	m <sup>3</sup> /h	820
		l/s	227
		CFM	483
QUIET	1140	m <sup>3</sup> /h	750
		l/s	208
		CFM	441

### ● Heating

Fan speed	Number of rotations (r.p.m.)	Airflow	
HIGH	1380	m <sup>3</sup> /h	940
		l/s	261
		CFM	553
MED	1300	m <sup>3</sup> /h	880
		l/s	244
		CFM	518
LOW	1220	m <sup>3</sup> /h	820
		l/s	227
		CFM	483
QUIET	1140	m <sup>3</sup> /h	750
		l/s	208
		CFM	441